

8118/121-805 Art. No. 133114



- Resistant Ex e enclosure, universally usable as connection or junction boxes and/or to safeguard electric distributors up to 6.3 A
- Degree of protection IP66
- With mantle terminals or with a combination of mantle terminals and miniature fuses (optional)

WebCode **8118A**



R. STAHL Series 8118 Ex e junction boxes are equipped with 4, 5 or 8 mantle terminals depending on their design size. As an option, miniature fuses can still be installed in addition. Junction boxes are also suitable for safeguarding. The robust enclosure made from glass fibre-reinforced polyester resin can be equipped with plastic or metal cable glands.

Technical Data

Explosion Protection

Scope of validity	European Union (ATEX) IECEx
Application range (zones)	1 2 21 22
IECEx gas certificate	IECEx PTB 06.0026
IECEx gas explosion protection	Ex eb IIC T6/T5 Gb
IECEx dust certificate	IECEx PTB 06.0026
IECEx dust explosion protection	Ex tb IIIC T80 °C ... T95 °C Db
ATEX gas certificate	PTB 99 ATEX 3103
ATEX gas explosion protection	II 2 G Ex eb IIC T6/T5 Gb
ATEX dust certificate	PTB 99 ATEX 3103
ATEX dust explosion protection	II 2 D Ex tb IIIC T80 °C ... T95 °C Db
EAC certificate	TS RU S-DE.AA71.B.00120
Certificates	ATEX (PTB), Brazil (ULB), China (NEPSI), EAC (LPE), IECEx (PTB)
Ship approval	BVIS
Notes	CCC certificate available from 2021 onward

Electrical Data

Rated operational voltage AC	750 V
------------------------------	-------

Ambient Conditions

Ambient temperature	-40 °C ... +40 °C (T6) -40 °C ... +55 °C (T5)
Ambient temperature	-40 °F ... +104 °F (T6) -40 °F ... +131 °F (T5)

Mechanical Data

Degree of protection IP (IEC 60529)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced

8118/121-805 Art. No. 133114

Mechanical Data

Silicone-free	No
Clamping range max.	6 mm ²
Connection cross-section	6 mm ²
Cover	Screw-on cover
Cover fixing type	M4 stainless steel screws, With captive screws
Width	115 mm
Width inches	4.53 in
Height	115 mm
Height inches	4.53 in
Depth	64 mm
Depth inches	2.52 in
Enclosure colour	Dark grey
Weight	0.57 kg
Weight	1.26 lb


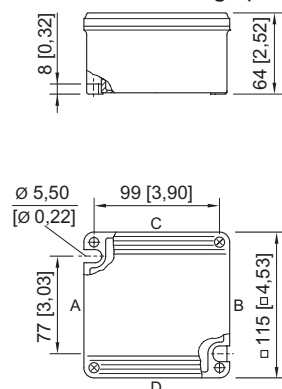
Mounting / Installation

Tightening torque of cover screw 1	1.4 Nm
Cover screw 1 tightening torque lbf in	12,4 lbf in

Components

Entry 1	3 x 8161/7-M25-1707 (provided separately)
Entry 1 type	Polyamide cable gland, black
Entry 1	M25 x 1.5
Entry 1 clamping range	7 ... 17 mm
Metal entry possible 1	No
Entry 2	1 x 8290/3-M25 (Provided separately)
Entry 2 type	Polyamide stopping plug
Entry 2	M25 x 1,5
Metal entry possible 2	No
Type of terminals 1	8 x Sheath terminal 6 mm ²

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



Length L

protrusion length for cable glands, Series 8161

in case of M20: 25 ... 31 [0.98 ... 1.22]

in case of M25: 27 ... 33 [1.06 ... 1.3]

in case of M32: 32 ... 39 [1.26 ... 1.54]







protrusion length for cable glands with strain relief, Series HSK-K-MZ

in case of M25: 41 [1,61]

8118/.2.
enclosure size 2

8118/121-805 Art. No. 133114

Accessories

Angle		Art. No.
	Angle 8118 size 2, for junction boxes 4 x M20	209556
	Angle 8118 size 2, for junction boxes 4 x M25	202959
Brass plate with thread		Art. No.
		244072
		211341
		244075
		211342
		211343
		168915
		168916
Cable gland		Art. No.
	8161/7-M20-1304 4 ... 13 mm ² , 50 pieces (delivery lot')	239156
Cable glands		Art. No.
	8161/7-M20-1307 7 ... 13 mm ² , 50 pieces (delivery lot')	239172
Stopping plug		Art. No.
	8290/3-M20, 100 pieces	285773

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.